


**VALVE FUNCTION**


- Electrically operated on/off (open/close) control valve.

**SOLENOID PRESSURE RESTRICTION**

Max. W.P. = 250 psi

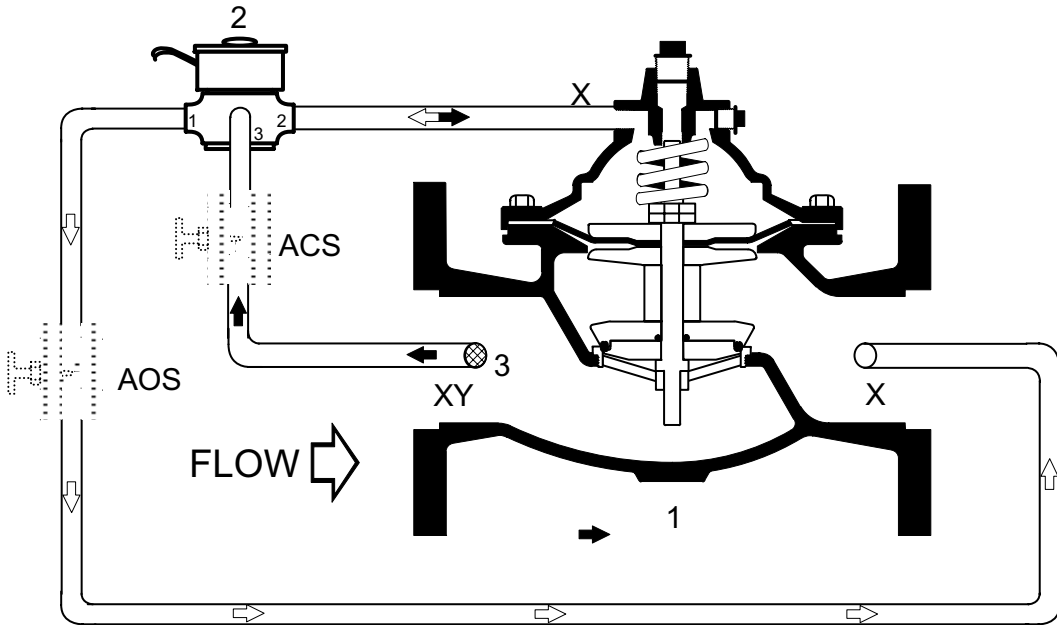

Flow Direction Shown: Under the Seat  
Optional 'R' Flow Over the Seat: 113-12R/6113-12R



**COMPONENTS**

- 1. Main Valve
- 2. 3-Way Solenoid
- 3. Flo-Clean Strainer

**ACCESSORIES**

Located as indicated  
Included as marked

- X - Isolation Cocks
- Y - Y-Strainer (Eliminates Flo-Clean)
- ACS - Adj. Closing Speed
- AOS - Adj. Opening Speed
- P - Position Indicator
- L - Limit Switch