



### VALVE FUNCTION

- Reduces higher inlet pressure to a constant lower outlet pressure (adjustable).
- Prevents upstream pressure from dropping below a preset minimum (adjustable).

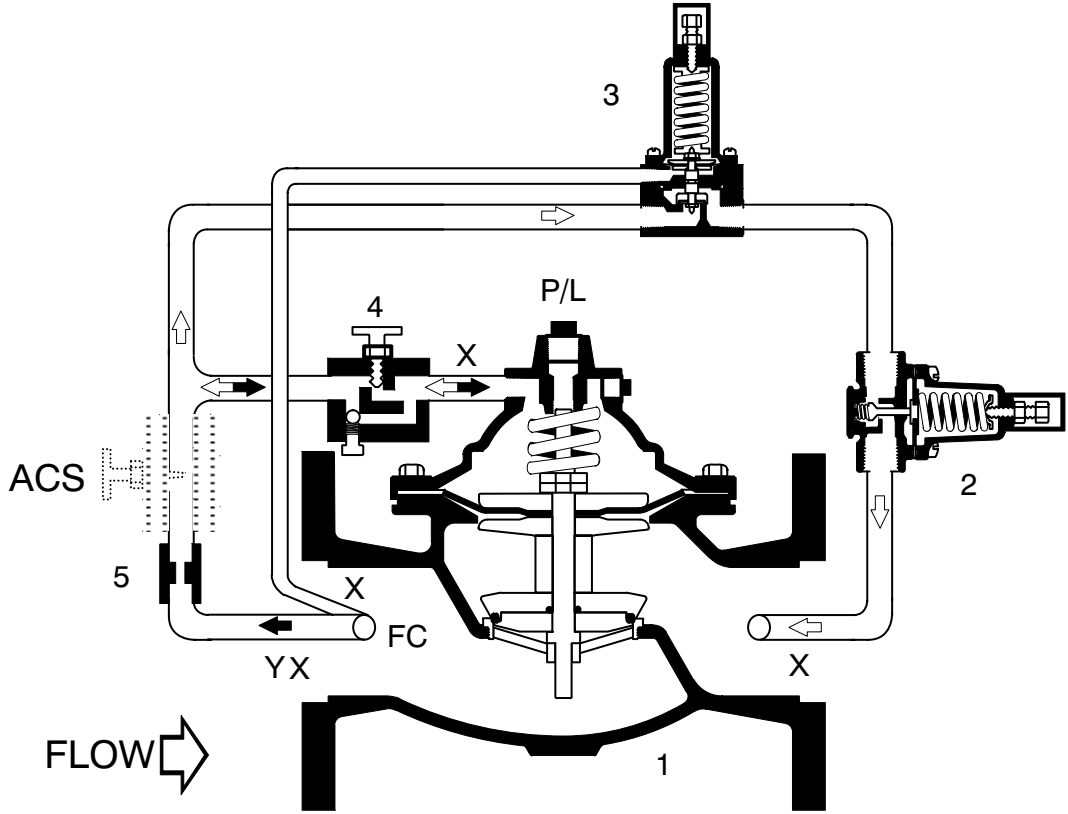

Flow Direction Shown: Under the Seat  
Optional "R" Flow Over the Seat: 115-2R/6115-2R



### COMPONENTS

- 1 - Main Valve
- 2 - 263 Reducing Control
- 3 - PV20 Sustaining Control
- 4 - Flow Control - Adj. Opening Speed
- 5 - Fixed Orifice

### ACCESSORIES

Located as indicated  
Included as marked

- |  |                                |
|--|--------------------------------|
|  | X - Isolation Cocks            |
|  | Y - Y-Strainer                 |
|  | FC - Flow Clean Strainer       |
|  | P - Position Indicator         |
|  | L - Limit Switch               |
|  | ACS - Adjustable Closing Speed |